







| 4 | 4 | 3 | 2 | 1 |
|-----------|-----------------------|----------------|---|---|
| CATEGORY | DESCRIPTION | P/N # | | |
| CONNECTOR | RJ45 8P8C 带壳沉板H=6.0mm | MJ88-BX11-HRV6 | | |

| REV. | ECN NO | DESCRIPTION | REVISED | DATE |
|------|--------|-------------|---------|------------|
| A01 | | New Release | XSY | 2014.02.13 |



SPECIFICATION

- VOLTAGE RATING: 150 VAC RMS.
- CURRENT RATING: 1.5 AMP
- CONTACT RESISTANCE: 40 mΩ MAX
- INSULATION RESISTANCE: 500MΩ MIN.
- WITHSTAND VOLTAGE:
AC1000V RMS 50Hz or 60Hz MIN.
- OPERATING TEMPERATURE: -40°C~+80°C

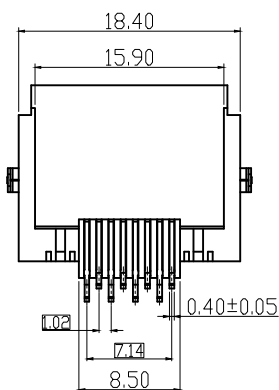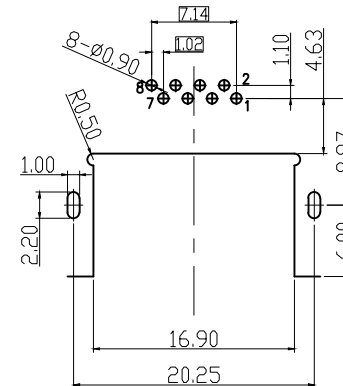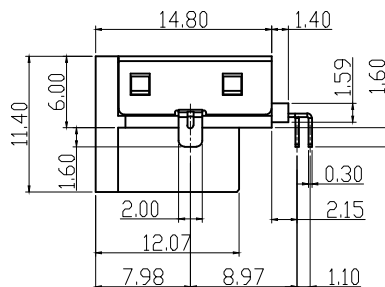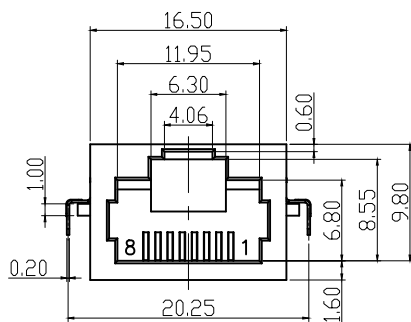

Part No.:
MJ88-BX11-HRV6

| | |
|---|------------------|
| X | Terminal Plating |
| 0 | G/F Plating |
| 1 | Au 3u" Plating |
| 2 | Au 6u" Plating |
| 3 | Au 15u" Plating |
| 4 | Au 30u" Plating |

Recommend PCB Layout
(Jack Top View)
Tolerance: ±0.05mm
Recommend PCB Thickness: 1.2mm

| c | SHELL | 1 | BRASS T=0.2mm | Ni PALTING | |
|-----|-----------|------|-------------------------|-----------------|--------|
| b | TERMINAL | 8 | PHOSPHOR BRONZE T=0.3mm | Au PALTING | |
| a | HOUSING | 1 | LCP UL94V-0 | BLACK | |
| NO. | PART NAME | Q'TY | MATERIAL | PLATING & COLOR | Remark |

| | | | |
|--|---------------------------------|---------------------|-----------------------|
| UNLESS OTHERWISE SPECIFIED TOLERANCES | SCALE: 1/1 | UNIT: mm | DWG.NO: WI-061-115 |
| | SIZE: A3 | PAGE: 1 OF 1 | |
| DECIMALS: X : ±0.5 X.X : ±0.3 X.XX : ±0.2 | ANGLES: X : ±2° X.X : ±1° | APPROVED BY Dick | CHECKED BY XSY |
| PREPARED BY XSY | | | |
| CUSTOMER COPY | | | |

 东莞市合陵电子有限公司
DongGuan Heling Electronic Co.,LTD